


MAXGARD[®] 600

DESCRIPTION

MAXGARD 600 is an effective 100% active liquid light stabilizer for use in plastics and coatings. It is miscible with a large number of common solvents and plasticizers which makes it easy to incorporate into many systems.

TYPICAL PROPERTIES

Physical form	Pale yellow liquid; 100% active
Melting Range	~ 5°C
Mass Density	1.27 g/cm ³ at 25°C
Absorptivity	52 at 287 nm
Solubilities (wt./wt.% at 30°C)	
Water	Immiscible
Methanol	Miscible
Acetone	Miscible
Methyl ethyl ketone	Miscible
Toluene	Miscible

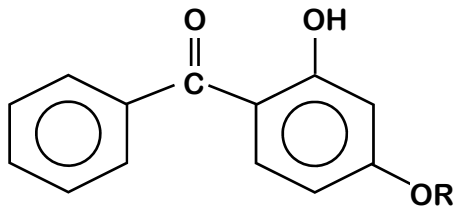


MAXGARD 600

Proprietary Mixture of Benzophenones

MAXGARD® 600

APPLICATIONS

- Plastics** Flexible and rigid PVC, PVC plastisols, liquid color formulations
Coatings Polyurethanes
Adhesives Vinyl, acrylic

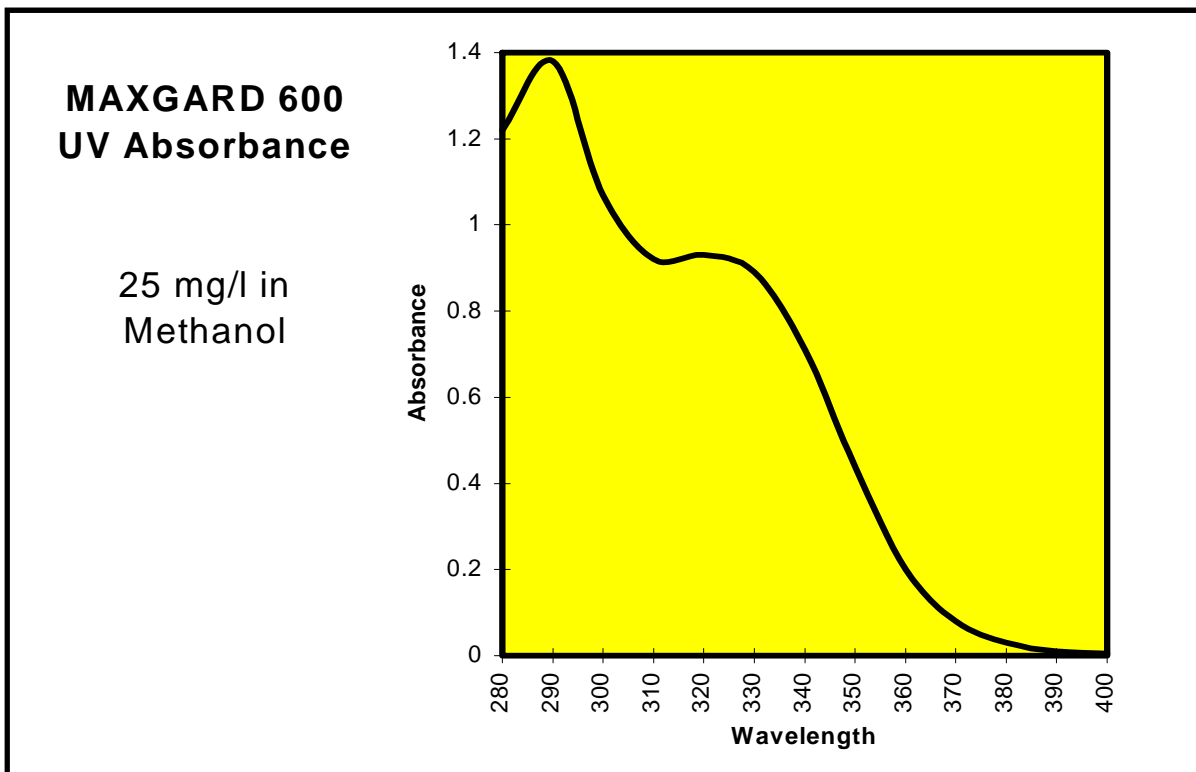

PACKAGING, SHIPPING & AVAILABILITY

The standard package sizes of Maxgard® 600 are 25 kg pails or 200kg steel drums.

NOTE: MSDS's for our products may be requested thru the website www.syrgisps.com.

"The information contained in this bulletin is based on information received of our staff and of others and is presented in good faith and with every belief in its accuracy. Due to the extensive technology involved in its usage, the manufacturer does not guarantee such information, nor does he make any recommendations as to its use in the infringement of any patent. The information contained in this bulletin supersedes and replaces all information contained in all previous bulletins. Seller makes no warranty of any kind, expressed or implied, except that the goods sold hereunder shall meet the specifications of the buyer. Users are responsible for determining the effectiveness of stabilizers in their specific applications."